

# 'ROTO' BI- FOLD DOORSET



**Heron Joinery**<sup>®</sup>

*Crafting Beauty & Warmth*

Through innovative design and full height glazing, Bi Folding doors bring the outside, inside, whilst enhancing the flow of natural light entering the home with a clear 90% unobstructed view, as the door leafs fold back on each other. The Roto Bifold will not give low level access and isn't Part M compliant. The Centor Bifold doorset, which is also available, will give low level access and is Part M compliant.

**Manufactured from selective timbers compliant with the classification requirements of BS 942 and from certified sustainable sources, additional prominent features and attributes include:**



- Individual door sections preservative treated prior to assembly
- Anti warp profile section design
- Suitability for openings up to 6 metres wide
- Variable positioning of master locking door
- Secure locking system
- Glazing configurations in compliance with BS 6262-4
- Fully weather sealed
- Hardware corrosive compliance with BS EN 1670
- Hardwood cill as standard
- Available in a range of high performance, durable stains or paint finishes to agreed customer specification

Bi-folding doors are available in a variety of combinations with options for locating the opening access sash, with up to 8 folding sashes in a frame. Alternately access can be gained via the folding sashes.

The Bi-folding door is ideal for new build and home extensions, including conservatories. Whilst providing a popular.



Roto Bifold Doorset	Door
Min Door Height	636
Max Door Height	2436
Max Door Width	936
Min Door Width	486
Max Frame Width	6000
Max No of Sashes Per Frame	8
Max Sash Weight	80kg

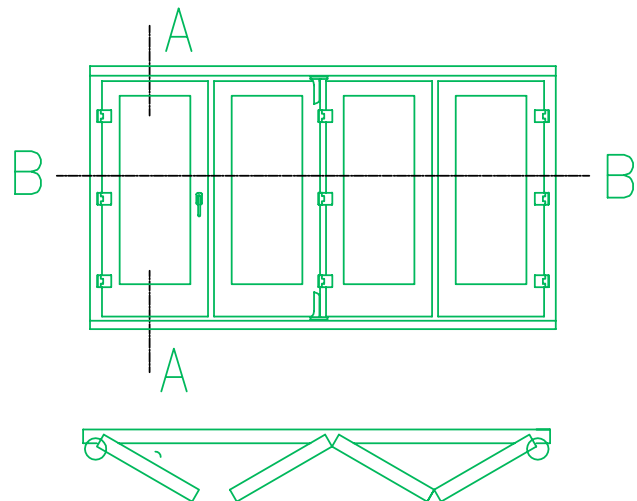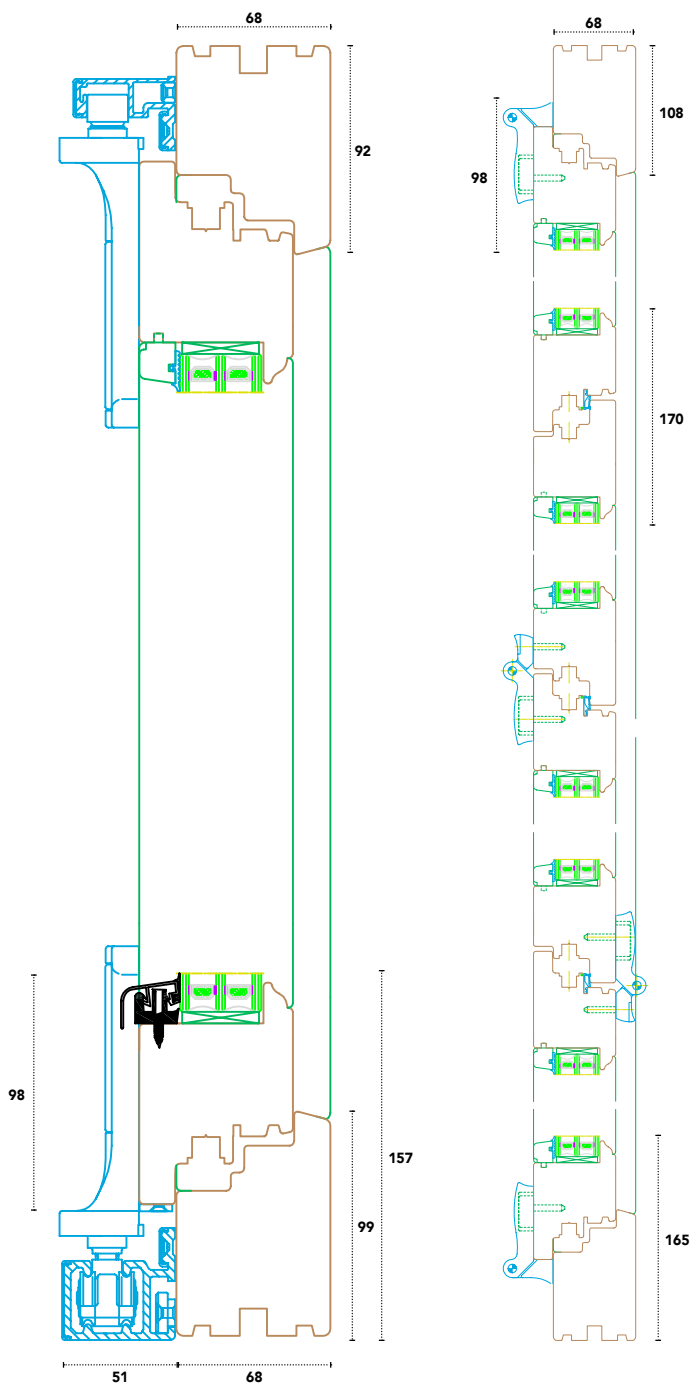

Heron Joinery has been crafting timber windows and doors for over 60 years

- 14 Different Window and Door Types
- U Values from 0.7
- Choice of Colours
- Single, Double and Triple Glazed Options
- 30 Year Timber Warranty
- Secure by Design Certified

[www.heronjoinery.com](http://www.heronjoinery.com)

#### 68mm Open Out Bifold

92mm x 68mm Frame Cill,  
99 x 68mm Frame Head,  
108 x 68mm Frame Jambs.

98mm x 68mm Door Stiles,  
head and cill.

28mm Double Glazed Units  
as standard with 36mm Triple  
glazing optional.

44mm Triple Glazing is  
available, however framing  
and door thickness changes  
to 78mm from 68mm, all width  
dimensions stay the same.

Standard glazing specification  
is Aluminium bottom bead with  
timber beads to sides and head.

Timber Drained Bottom Block  
is also available.

Bifold Gear is available in Silber,  
White or Medium Bronze finishes.

#### Contact

[heronjoinery@heronjoinery.com](mailto:heronjoinery@heronjoinery.com)

028 7962 7277



**Heron Joinery**<sup>®</sup>

*Crafting Beauty & Warmth*