## SLIDING PATIO DOORSET



Innovative technology and hi-tech design enables our sliding patio doors to provide a full view and ease of accessibility to the outdoors, all from the turn of a single operating handle enabling the door to smoothly slide open.

Manufactured from selective timbers compliant with the classification requirements of BS 942 and from certified sustainable sources, additional prominent features include:

- Individual door sections preservative treated prior to assembly
- Anti warp profile section design
- Effective security of lift and slide elements, enabling effortless ease of operation
- Handle range offering the right choice for interior and additional external operation
- Barrier free threshold option providing clear access and egress for all levels of mobility in line with Part M compliance
- External glazing configurations in compliance with BS 6262-4
- Fully weather sealed
- Hardware corrosive compliance with BS EN 1670
- Hardwood cill as standard
- Available in a range of high performance, durable stains or paint finishes to agreed customer specification


Lift and slide doors are available in either single opening sash, right to left or double opening sash arrangement (from to centre to left and right)

The Lift and Slide door is ideal for new build and home extensions, including conservatories. Whilst providing a popular choice as replacement for French doors.





Sliding Patio	Door	Frame
Min Door Height	1190	1326
Max Door Height	2690	2826
Max Door Width	3335	
Min Door Width	720	
Max Door Weight	300kg	

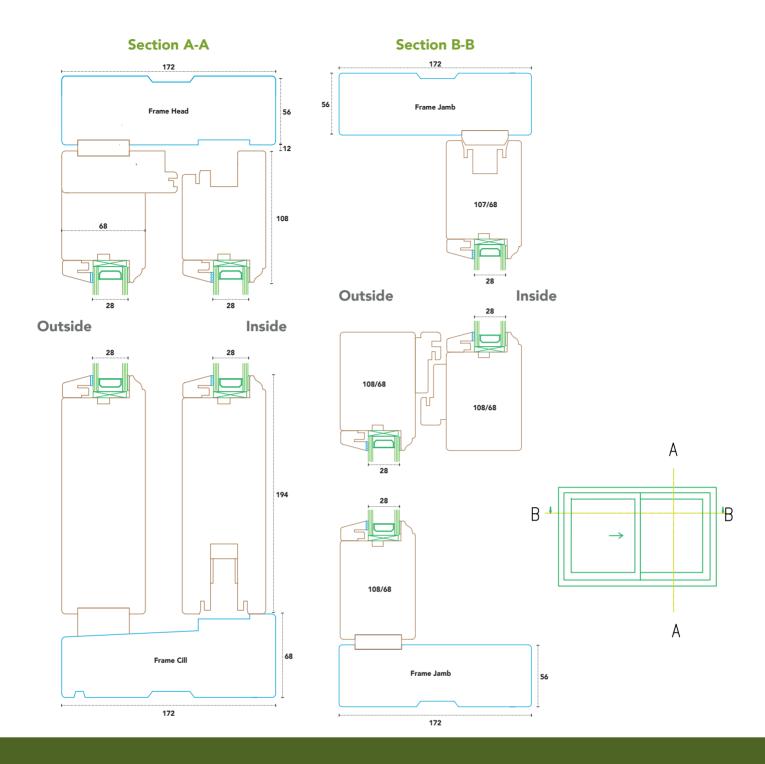

Heron Joinery has been crafting timber windows and doors for over 40 years

- 14 Different Window and Door Types
- U Values from 0.7
- Choice of Colours
- Single, Double and Triple Glazed Options
- 40 Year Timber Warranty
- Secure by Design Certified

Elevation Sectional Drawing of External Glazed 68mm Lift & Slide Patio Doors

108 x 68mm Door stiles and head.

 $194 \times 68$ mm Door Bottom Rail.

28mm Double Glazed Unit with 23 x 18 bead. (36mm D/G available on request)

174 x 56mm Frame head and

174 x 68mm Frame Cill.

## Contact



Crafting Beauty & Warmth